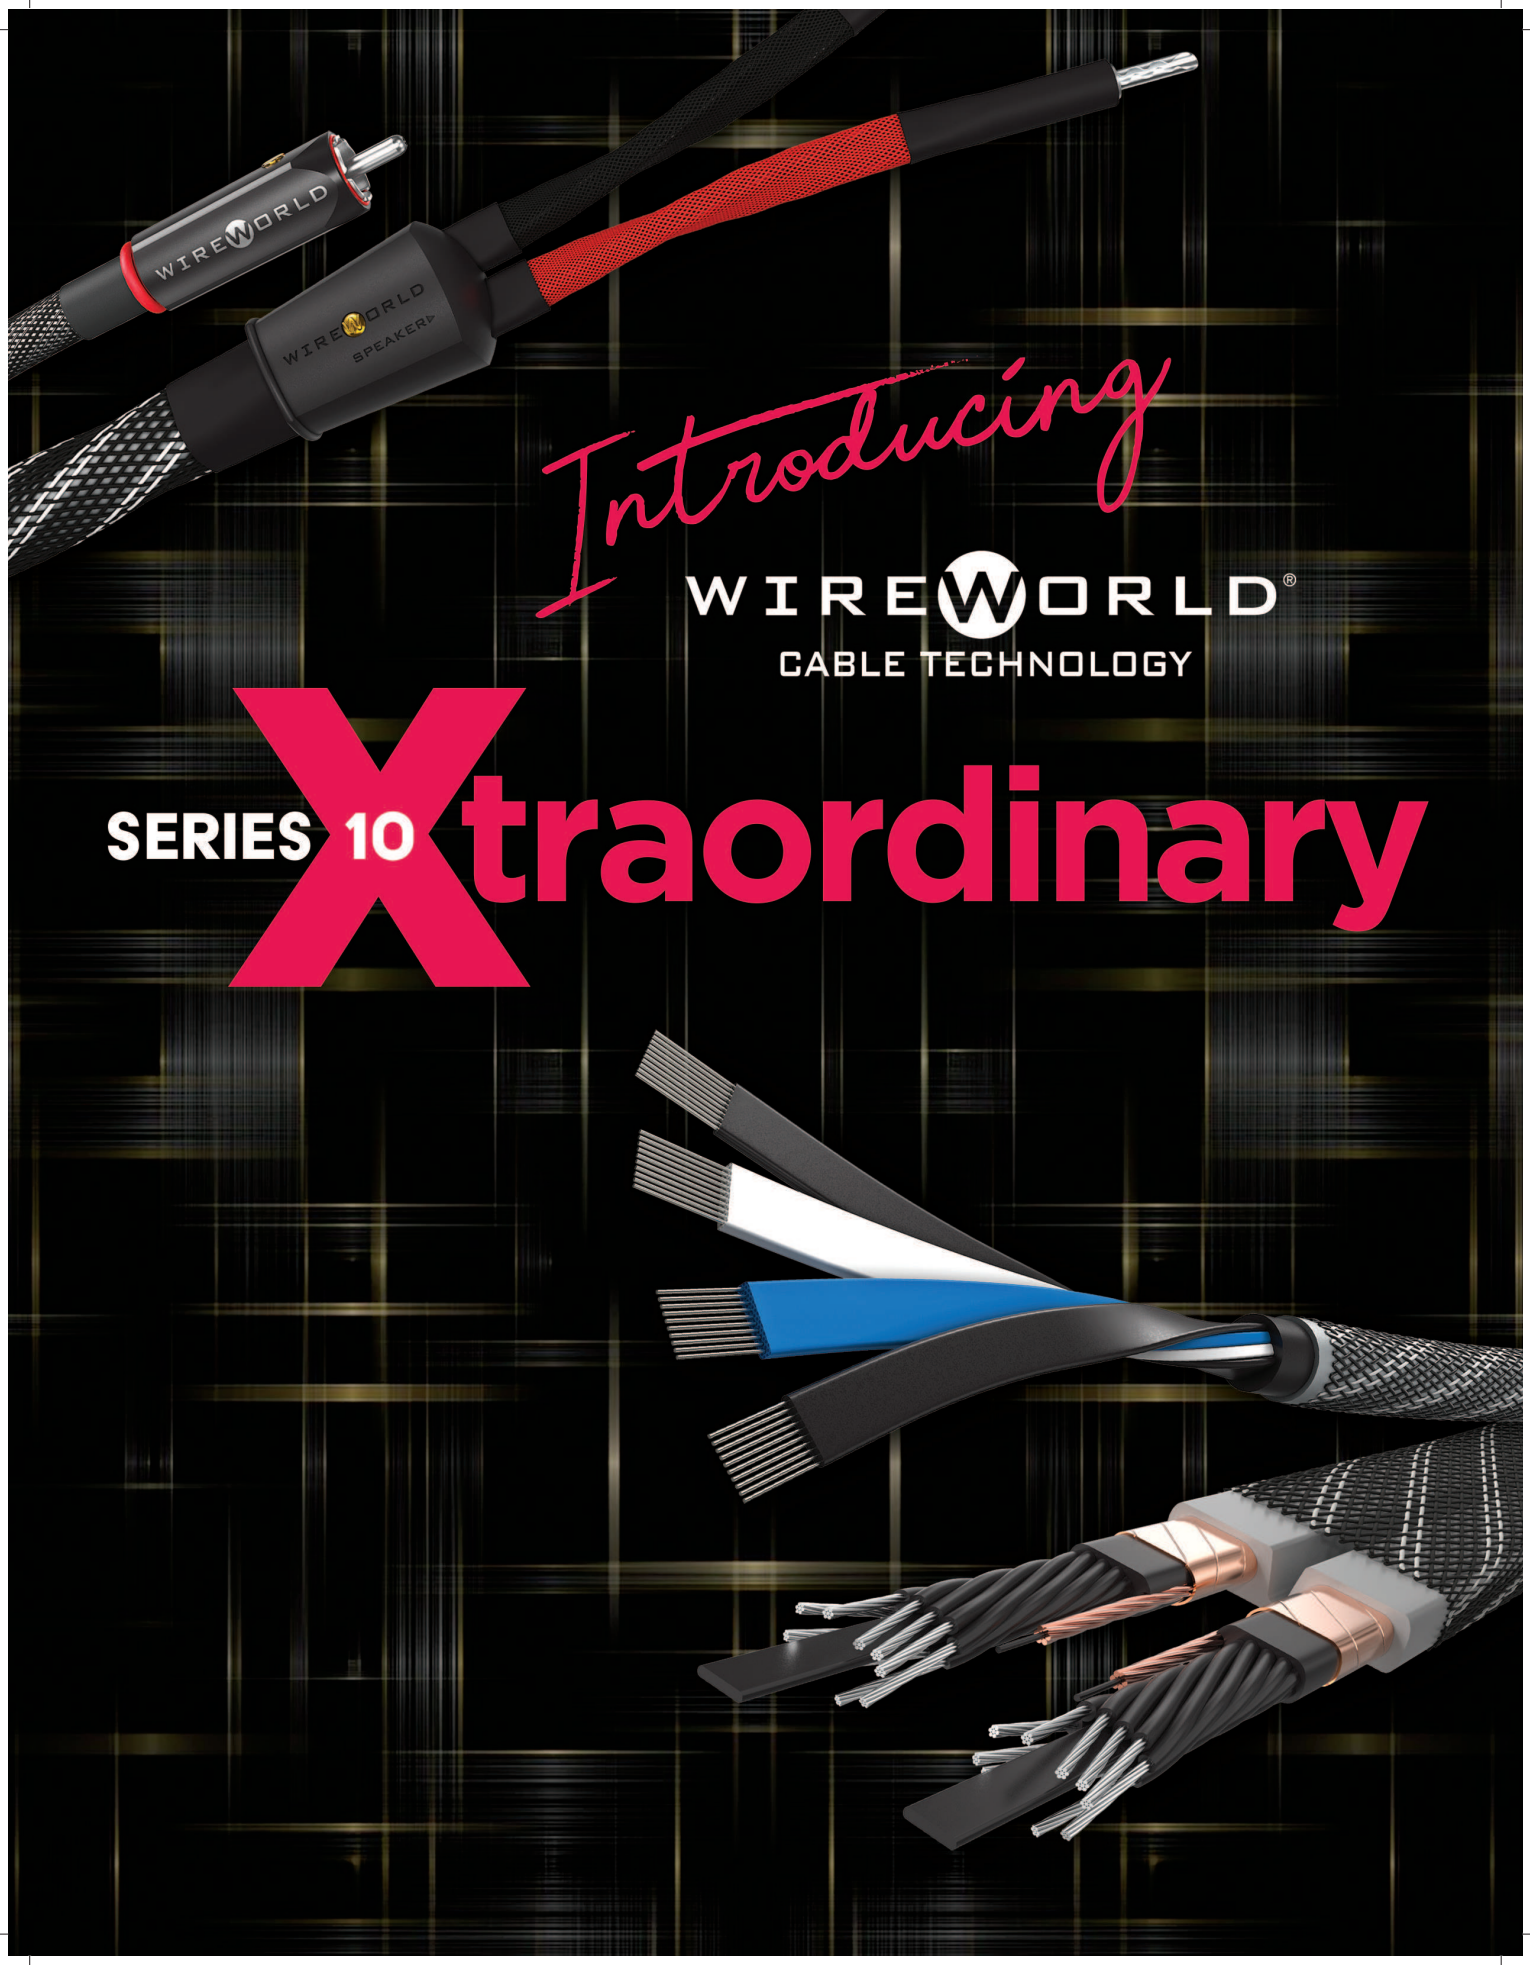



Series10_Brochure.indd 1 10/5/24 11:44 AM

Celebrating 30 Years of Innovation

Wireworld was founded with the unique mission of perfecting audio cables through objective listening tests. These scientific tests ensure that each new generation of cables we produce lets you hear more of the original sound than previous cables. After five years of development beyond our highly acclaimed Series 8, we are pleased to announce our **Series 10** cables, the next great step toward musical perfection.

COMPOSILEX® 5 Insulation Technology

Insulation materials are very important in cable design and designers usually select whatever standard materials they find to work the best. The problem with that approach is that none of those standard materials have both low loss and low triboelectric noise. To overcome that limitation, we developed our own composite insulation materials. Now in their latest generation, **COMPOSILEX 5** insulation materials are the most effective ever at minimizing both noise and loss, enabling us hear more musical detail and purity than ever before.

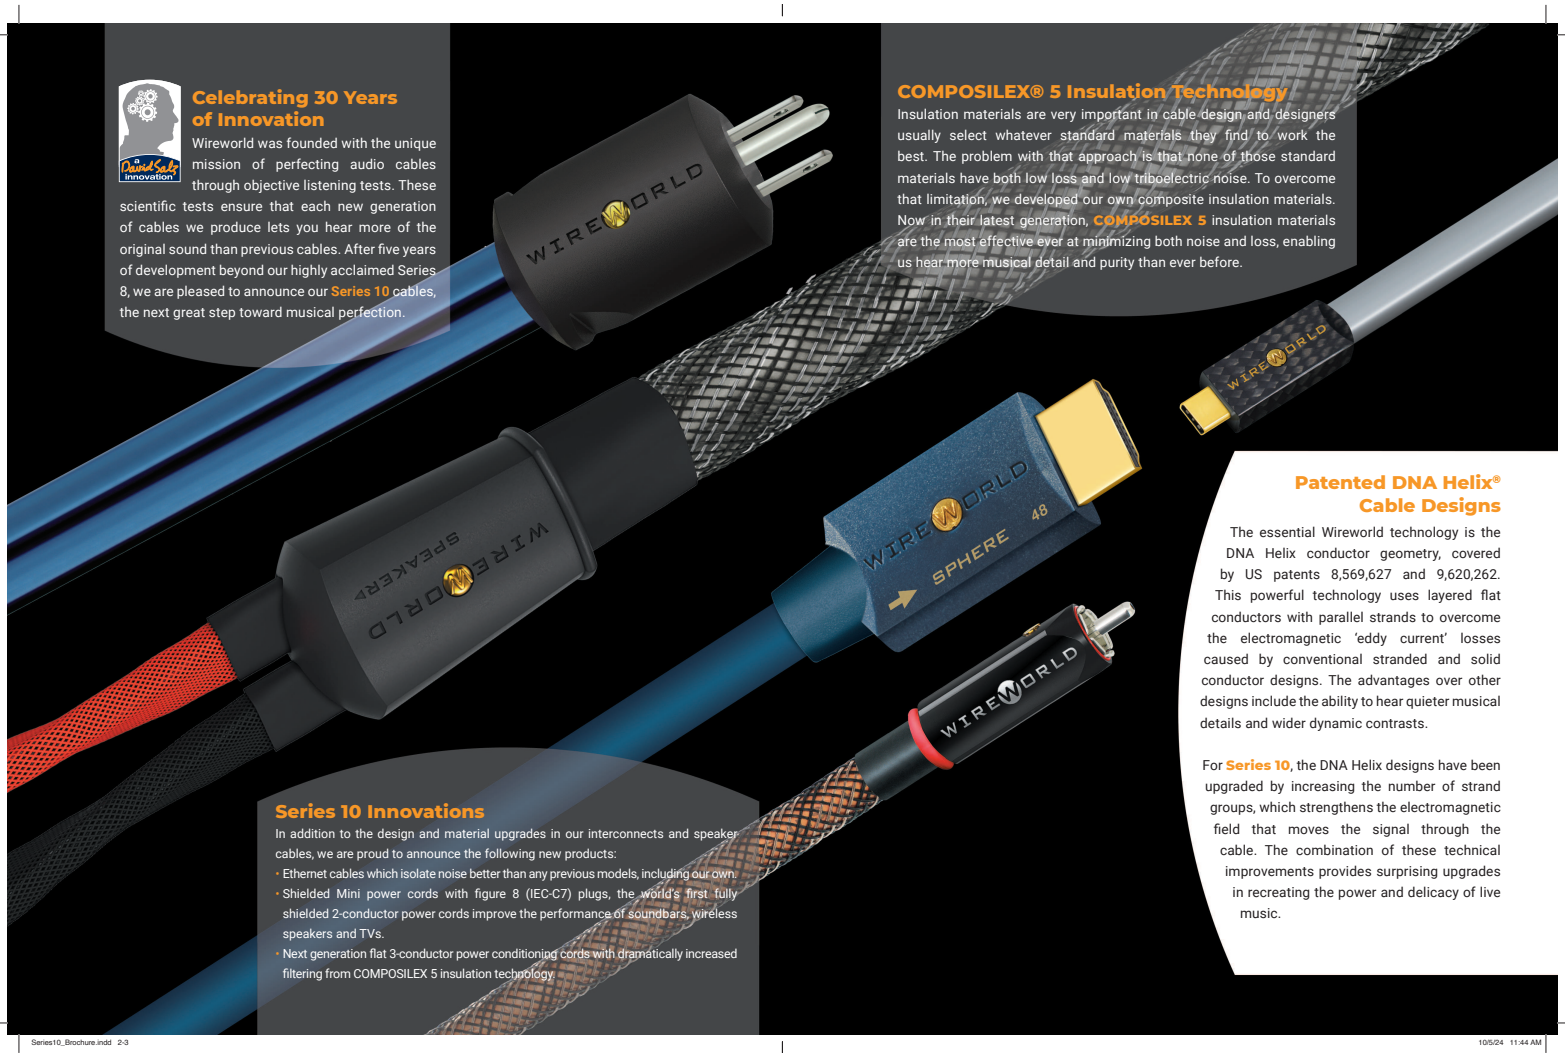

Patented DNA Helix® Cable Designs

The essential Wireworld technology is the DNA Helix conductor geometry, covered by US patents 8,569,627 and 9,620,262. This powerful technology uses layered flat conductors with parallel strands to overcome the electromagnetic 'eddy current' losses caused by conventional stranded and solid conductor designs. The advantages over other designs include the ability to hear quieter musical details and wider dynamic contrasts.

For **Series 10**, the DNA Helix designs have been upgraded by increasing the number of strand groups, which strengthens the electromagnetic field that moves the signal through the cable. The combination of these technical improvements provides surprising upgrades in recreating the power and delicacy of live music.

Series 10 Innovations

In addition to the design and material upgrades in our interconnects and speaker cables, we are proud to announce the following new products:

- Ethernet cables which isolate noise better than any previous models, including our own.
- Shielded Mini power cords with figure 8 (IEC-C7) plugs, the world's first fully shielded 2-conductor power cords improve the performance of soundbars, wireless speakers and TVs.
- Next generation flat 3-conductor power conditioning cords with dramatically increased filtering from COMPOSILEX 5 insulation technology.

Wireworld® Series 10 Product Line

KEY: ● Feature ★ Series 10 Improvements

		CABLE	WIRE GAUGE		MATERIALS		CABLE TECHNOLOGIES								CONNECTORS			
			AWG	(Metric)	Conductor	Composilex Insulation	Fluxfield	Vividtech	Tite-Shield	Uni-Path	DNA Helix Dual	DNA Helix Tri	DNA Helix Quad	DNA Helix Octo	Gold Contacts	Silver Contacts	Silver System	Uni-Term
SPEAKER	Standard Only	Horizon™	16ga.	(1.25mm²)	OFC										●			
		Helicon™ 16x OFC	16ga.	(1.25mm²)	OFC	5 ★					★				●			
		Helicon™ 16x OCC	16ga.	(1.25mm²)	OCC-7N Copper	5 ★					★					●		
		Stream™ 10	16ga.	(1.25mm²)	OFC	5 ★					★				●			
	Standard or Biwire Termination	Luna™ 10	14ga.	(2mm²)	OFC	5 ★							★		●			
		Solstice® 10	13ga.	(2.5mm²)	OFC	5 ★							★		●			
		Mini Eclipse™ 10	13ga.	(2.5mm²)	OCC-7N Copper	5 ★							★			●	●	
		Oasis® 10	11ga.	(4mm²)	OFC	5 ★							★			●	●	
		Equinox® 10	11ga.	(4mm²)	OCC-7N Copper	5 ★							★			●	●	
		Eclipse™ 10	9ga.	(6mm²)	OCC-7N Copper	5 ★								★		●	●	
		Silver Eclipse™ 10	9ga.	(6mm²)	OCC-7N Silver/Copper	5 ★								★		●	●	
		Platinum Eclipse™ 10	8ga.	(8mm²)	OCC-7N Solid Silver	5 ★								★		●	●	
INTERCONNECTS	RCA / XLR	Stream™	25ga.	(.16mm²)	OFC	3					●				●			
		Luna™ 10	23/26ga.	(.26/.13mm²)	OFC	5 ★						★			●			
		Solstice® 10	23/26ga.	(.26/.13mm²)	Silver-Plated OFC	5 ★						★			●			
		Oasis® 10	21/24ga.	(.4/.2mm²)	OFC	5 ★						★				●		
		Equinox® 10	21/24ga.	(.4/.2mm²)	OCC-7N Copper	5 ★						★				●		
		Eclipse™ 10	18/21ga.	(.8/.4mm²)	OCC-7N Copper	5 ★							★			●		
		Silver Eclipse™ 10	18/21ga.	(.8/.4mm²)	OCC-7N Silver/Copper	5 ★							★			●		
		Gold Eclipse™ 10	18/21ga.	(.8/.4mm²)	Solid Silver	5 ★							★			●		
		Platinum Eclipse™ 10	17/20ga.	(1/.5mm²)	OCC-7N Solid Silver	5 ★							★			●		
	Mini Jack	iWorld™	25ga.	(.16mm²)	OFC										●			
HDMI	Fiber	Starlight® 48	German Chips/US Lasers		OM3 Glass Fibers	3									●			
		Stellar™ 48	German Chips/US Lasers		OM3 Glass Fibers	3		●							●			
	Round	Radius™ 48	Varies with Length		OFC	3									●			
		Sphere™ 48	Varies with Length		OFC	3				●					●			
		Silver Sphere™ 48	28ga.	(.08mm²)	Silver-Clad OFC	3				●					●			
	Flat	Platinum Starlight® 48	28ga.	(.08mm²)	Solid Silver	3				●						●		
DIGITAL AUDIO	Toslink	Nova™ Toslink	Monofiliament		Acrylic (PMMA)													
		Supernova™ Toslink	338 Borosilicate		Glass Fibers													
	RCA Coaxial 75Ω	Chroma™ 10	24ga.	(.2mm²)	OFC	5 ★						●			●			
		Ultraviolet® 10	24ga.	(.2mm²)	Silver-Plated OFC	5 ★						●			●			
		Starlight® 10	26ga.	(.13mm²)	Silver-Clad OFC	5 ★						●				●		
		Silver Starlight® 10	24ga.	(.2mm²)	OCC-7N Silver/Copper	5 ★						★				●		
		Gold Starlight® 10	24ga.	(.2mm²)	Solid Silver	5 ★						★				●		
		Platinum Starlight® 10	21ga.	(.4mm²)	OCC-7N Solid Silver	5 ★						★				●		
	XLR 110Ω	Micro-Eclipse™ 10	26ga.	(.13mm²)	OCC-7N Copper	5 ★						★				●		
		Micro-Silver Eclipse™ 10	26ga.	(.13mm²)	OCC-7N Silver/Copper	5 ★						★				●		
		Micro-Platinum Eclipse™ 10	26ga.	(.13mm²)	OCC-7N Solid Silver	5 ★						★				●		
		Platinum Starlight® 10	21ga.	(.4mm²)	OCC-7N Solid Silver	5 ★						★				●		
	Ethernet	Chroma™ 10	23ga.	(.26mm²)	OFC	5 ★			●						●			
		Starlight® 10	23ga.	(.26mm²)	Silver-Clad OFC	5 ★			●						●			
		Platinum Starlight® 10	23ga.	(.26mm²)	OCC-7N Solid Silver	5 ★			●						●			
	USB 2.0	Chroma™ 8	28ga.	(.08mm²)	OFC	3				●					●			
		Starlight® 8	28ga.	(.08mm²)	Silver-Clad OFC	3				●					●			
		Platinum Starlight® 8	28ga.	(.08mm²)	Solid Silver	3				●					●			
	USB 3.1	Chroma™ 8	28ga.	(.08mm²)	OFC	3				●					●			
		Starlight® 8	28ga.	(.08mm²)	Silver-Clad OFC	3				●					●			
POWER	Flat	Stratus™ 10	12ga.	(3mm²)	OFC	5 ★	●									●		
		Aurora™ 10	12ga.	(3mm²)	Silver-Clad OFC	5 ★	●									●		
		Electra™ 10	12ga.	(3mm²)	OCC-7N Copper	5 ★	●									●		
		Silver Electra™ 10	12ga.	(3mm²)	OCC-7N Silver/Copper	5 ★	●									●		
		Platinum Electra™ 10	12ga.	(3mm²)	OCC-7N Solid Silver	5 ★	●									●		
	Mini	Shielded Mini-Stratus™	16ga.	(1.25mm²)	OFC	5 ★	★									●		
		Shielded Mini-Electra™	16ga.	(1.25mm²)	OCC-7N Copper	5 ★	★									●		

© 2024 Wireworld, Inc.

Because we are continually striving to improve our products, all specifications and prices are subject to change without notice.